

Parallel Fabrics

kettal


Parallel Fabrics

Description

The design was created by closely observing the structure of the fabric. Taking into account that this new fabric would be utilised as screens for pavilions, Doshi Levien created a fabric that would permit the passage of light and emit a pleasant chequered shadow pattern. The same fabric can also be used in cushions for Kettal furniture.

Has ISO 9001 and Greenguard certification.

Provides resistance to ignition without flame and is easy to maintain.

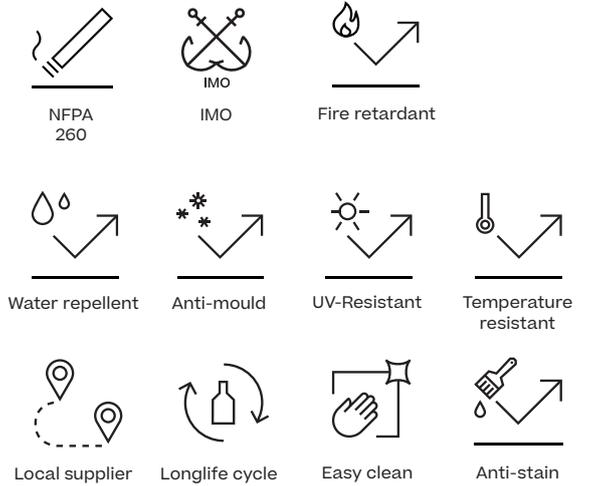

kettal

Technical specifications

Composition	73% PVC 27% PES
Frame	REPS-NET
Thickness (mm)	1,05
Weight (g/m ²)	620 (UNI 9213/3)
Frame density	UNI 1049/2
Warp (fili-yarn/cm)	7,8
Weft (fili-yarn/cm)	6,7
Breaking load	UNI EN ISO 1421
Warp (kg/5cm)	330
Weft (kg/5cm)	290
Breaking elongation	UNI EN ISO 1421
Warp	20%
Weft	17%
Fire retardant	IMO RESOLUTION MSC.307 (88) ANNEX 1 PART 8 – TEST OF UPHOLSTERED FURNITURE · CALIFORNIA TECHNICAL BULLETIN 117-2013; Section 1: Cover Fabric Test · NFPA 260: 2013 · UNE-EN 1021: 2015

Colours



White Anemone
527



Lace Coral
528



Padina
564



Saline
571



Alaria
572



Sponge
536



Fucus
537



Urchin
547



Kelp
556




Turtle grass
553



Deep Ocean
570



Winter Sea
569



Xenia
568



Plumaria
567



Irish moss
559



Coral
562



Dulse
565

Certificates



Maintenance & care instructions

For normal cleaning, use water and liquid detergents, colorless, and non-abrasive. We recommend leaving the detergent to act for a few minutes and, if necessary, rub the surface with brushes exclusively with soft bristles, therefore rinse thoroughly with warm water.

Do not use salt water.

Do not use acidic solutions or organic solvents.

Do not use pressurised water.

